



TC-0163-BLA

V0

EASY SURFACE Ceiling fixture




Description

Downlight for indoor use.

For downlighting. Evenly distributed light flow. Structure material: Acrylic. Structure finish: Matt white. Diffuser material: Plastic. Diffuser finish: Opal. Warranty: 5 Years.

Finish
Matt white
Opal

Material
Acrylic
Plastic



TECHNICAL CHARACTERISTICS

Light source

Light source: LED MLS
Output (W): 15.5W
Total power consumption (W): 18,2W
Color temperature: Neutral white - 4000K
Real Lumen: 1508
Qty Leds: 90
Lm/Real W: 83
Life Time: 36.000 L70B30
Bin / Grup: 40-0A o 40-0B
UGR: 22.8

GEAR

Brand: LXD
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.92


Luminaire

Warranty: 5 Years

Logistics



Energy Efficiency: LED A++
EAN Code: 8435381449100
Net Weight (Kg): 0.540
Weight in Kg (packaged): 0.603
Packing: 245 x 45 x 245
Masterbox: 20

The photograph may not match the reference exactly. Please read the product description to identify the finish.

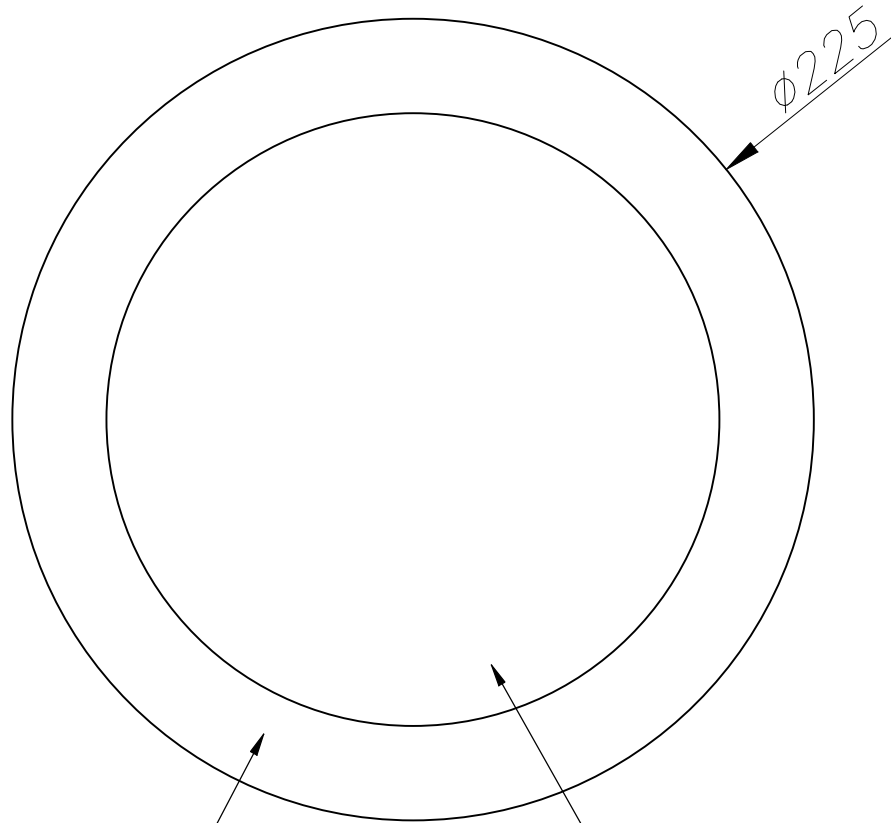

ALUMINIO INYECTADO
INJECTED ALUMINIUM

ACRÍLICO
OPAL

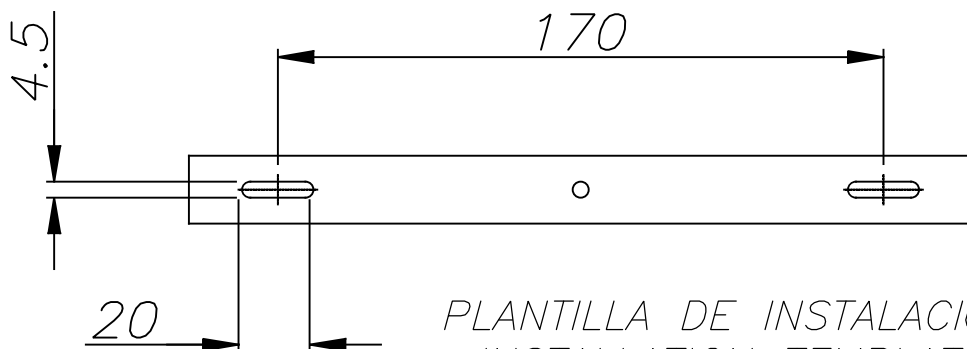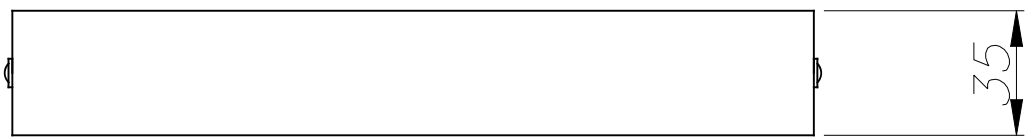





PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

Scale 1:2



TC-0411 TC-0412 TC-0462
TC-0415 TC-0416

TC-0158 TC-0160 TC-0162
TC-0159 TC-0161 TC-0163

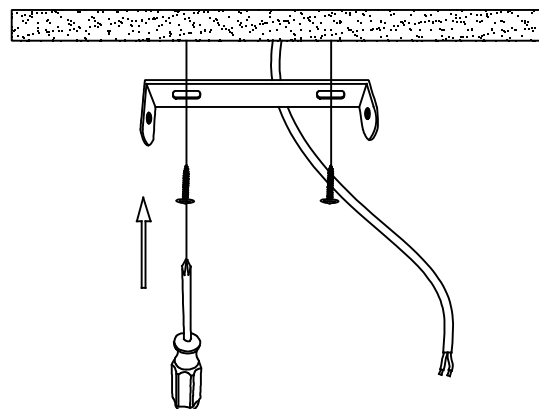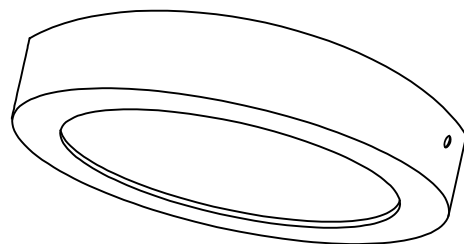

ES) BLOQUE DE CONEXIÓN A RED QUE SE DEBE UTILIZAR (no incluido):
EN) MAINS TERMINAL BLOCJ REQUIRED (not included):
FR) BORNIER DE RACCORDEMENT AU RESEAU REQUIS (non inclus):
DE) NOTWENDIGE VERBINDUNGSDOSE FÜR DEN NETZANSCHLUSS (nicht inklusive):

