



TC-0155-BLA

V0

EASY Downlight recessed



Description

Downlight for indoor use.

For downlighting. Ultra-thin design. Evenly distributed light flow. Structure material: Aluminium. Structure finish: Matt white. Diffuser material: Acrylic. Diffuser finish: Opal. Warranty: 5 Years.

Finish
Matt white
Opal

Material
Aluminium
Acrylic



TECHNICAL CHARACTERISTICS

Light source

Light source: LED MLS
Output (W): 10W
Total power consumption (W): 12,2W
Color temperature: Neutral white - 4000K
Real Lumen: 961
Qty Leds: 60
Lm/Real W: 79
Life Time: 36.000 L70B30
Bin / Grup: 40-0A o 40-0B
UGR: 22.8

GEAR

Brand: LXD
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.96


Luminaire

Warranty: 5 Years

Logistics



Energy Efficiency: LED A++
EAN Code: 8435381449025
Net Weight (Kg): 0.310
Weight in Kg (packaged): 0.396
Packing: 180 x 45 x 200
Masterbox: 40

The photograph may not match the reference exactly. Please read the product description to identify the finish.

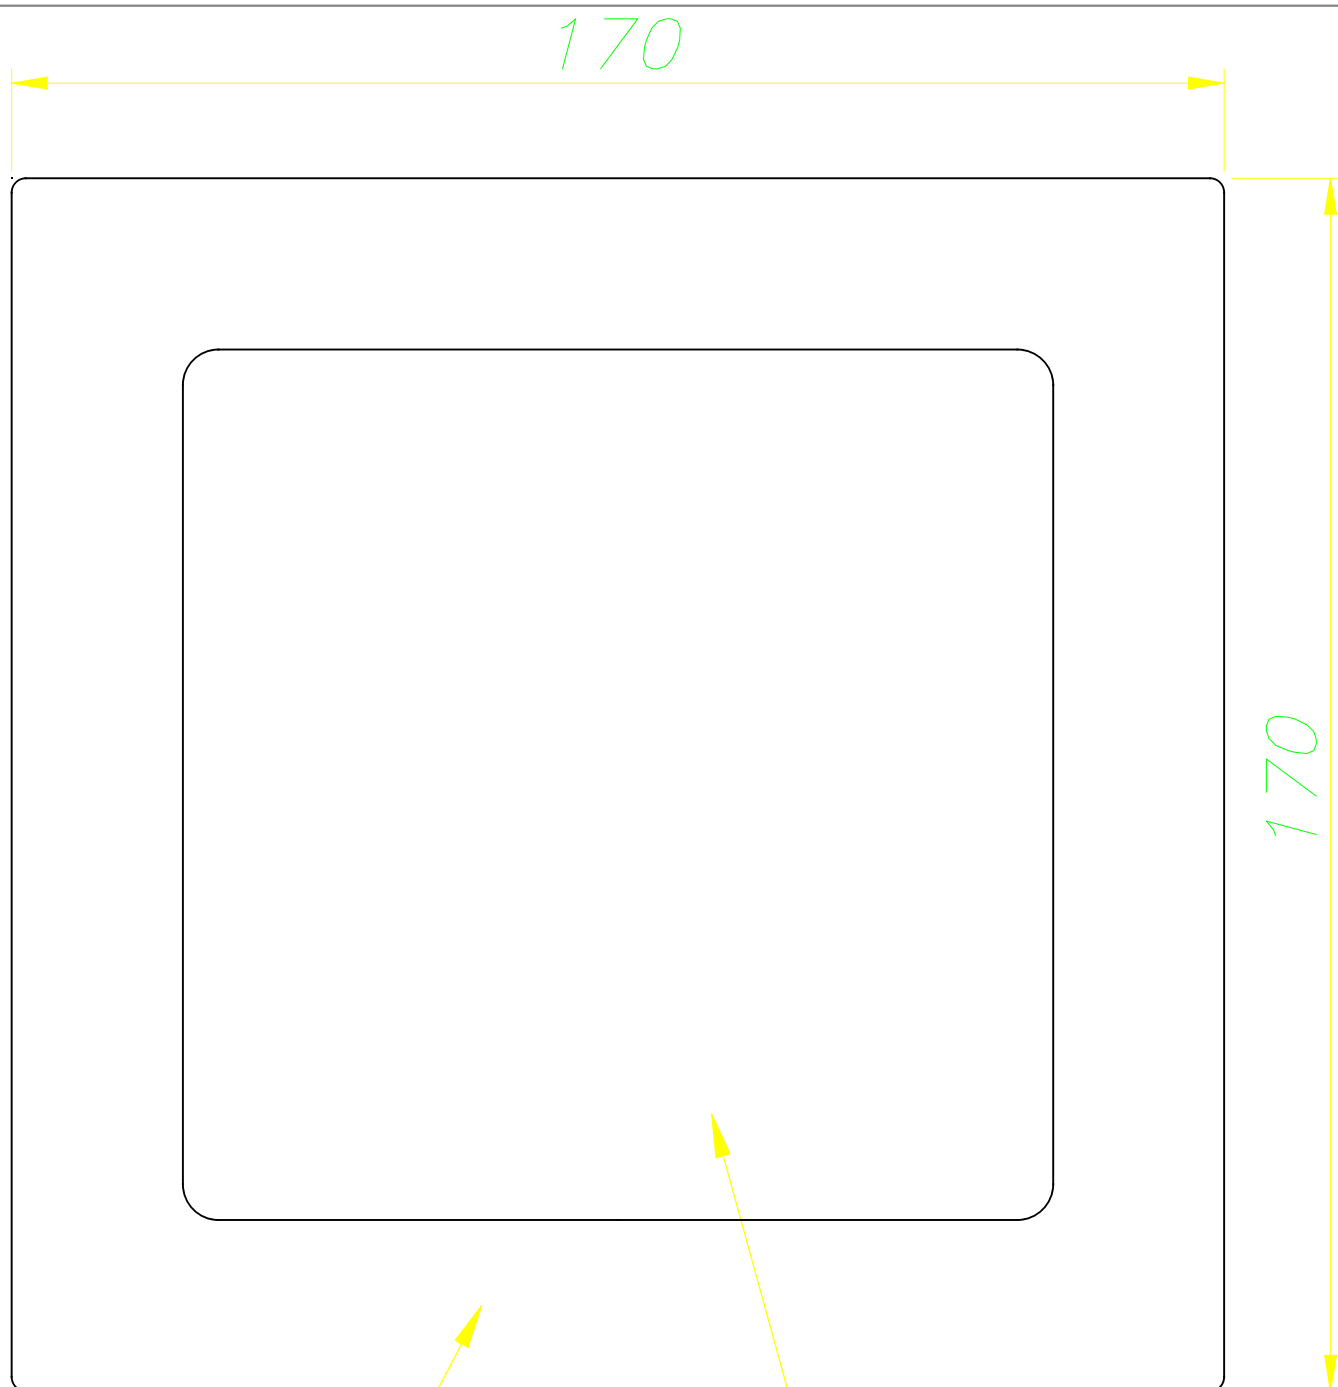


ALUMINIO INYECTADO
INJECTED ALUMINIUM

ACRÍLICO
OPAL




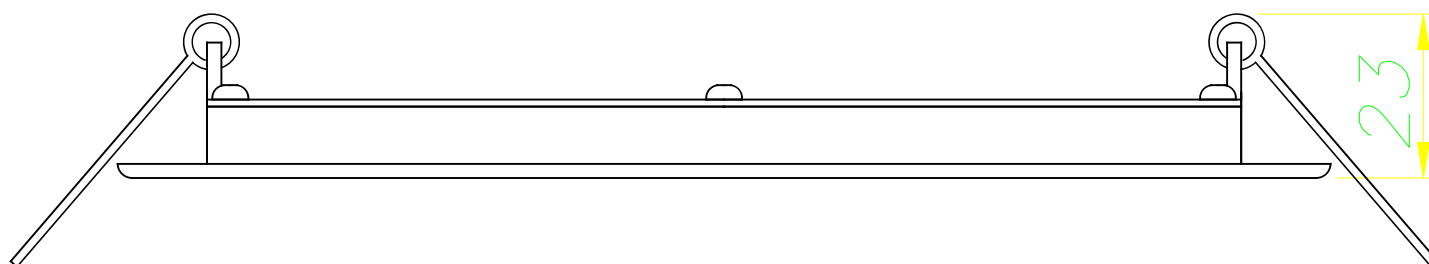


155x155



0-12mm

Scale 1:1

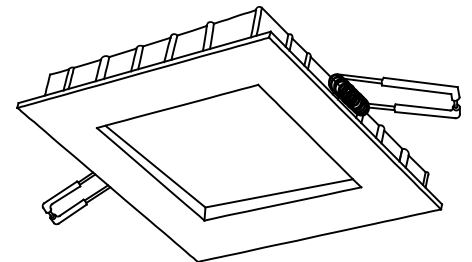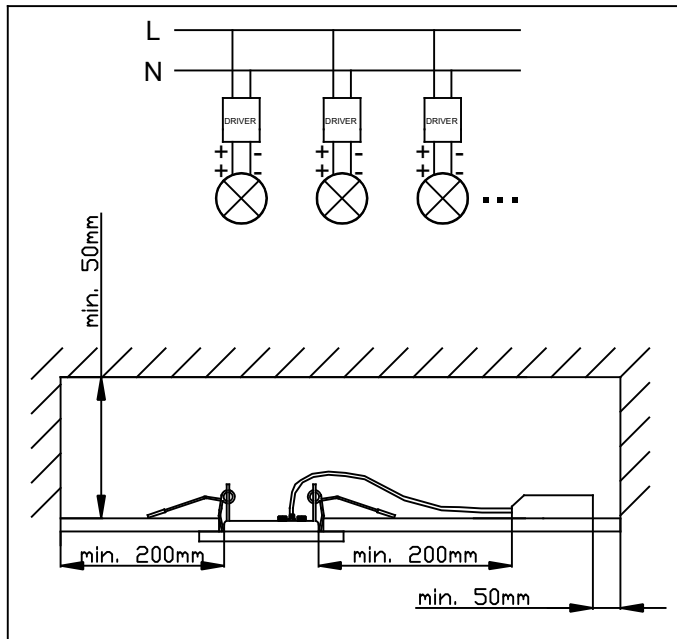

ES) BLOQUE DE CONEXIÓN A RED QUE SE DEBE UTILIZAR (no incluido):
 EN) MAINS TERMINAL BLOCK REQUIRED (not included):
 FR) BORNIER DE RACCORDEMENT AU RESEAU REQUIS (non inclus):
 DE) NOTWENDIGE VERBINDUNGSDOSE FÜR DEN NETZANSCHLUSS (nicht inklusive):

