



## TC-0156-BLA

V0

### EASY Downlight recessed


#### Description

Downlight for indoor use.

For downlighting. Ultra-thin design. Evenly distributed light flow. Structure material: Aluminium. Structure finish: Matt white. Diffuser material: Acrylic. Diffuser finish: Opal. Warranty: 5 Years.

**Finish**  
Matt white  
Opal

**Material**  
Aluminium  
Acrylic



#### TECHNICAL CHARACTERISTICS

##### Light source

Light source: LED MLS  
Output (W): 15.5W  
Total power consumption (W): 18,2W  
Color temperature: Warm White - 3000K  
Real Lumen: 1371  
Qty Leds: 90  
Lm/Real W: 75  
Life Time: 36.000 L70B30  
Bin / Grup: 30-0A o 30-0B  
UGR: 21.8

##### GEAR

Brand: LXD  
Gear included: Yes, electronic  
Voltage / Frequency:  
100-240VAC/50-60Hz  
Power Factor: 0.96


##### Luminaire

Warranty: 5 Years

##### Logistics



Energy Efficiency: LED A++  
EAN Code: 8435381449032  
Net Weight (Kg): 0.515  
Weight in Kg (packaged): 0.645  
Packing: 255 x 45 x 235  
Masterbox: 20

The photograph may not match the reference exactly. Please read the product description to identify the finish.

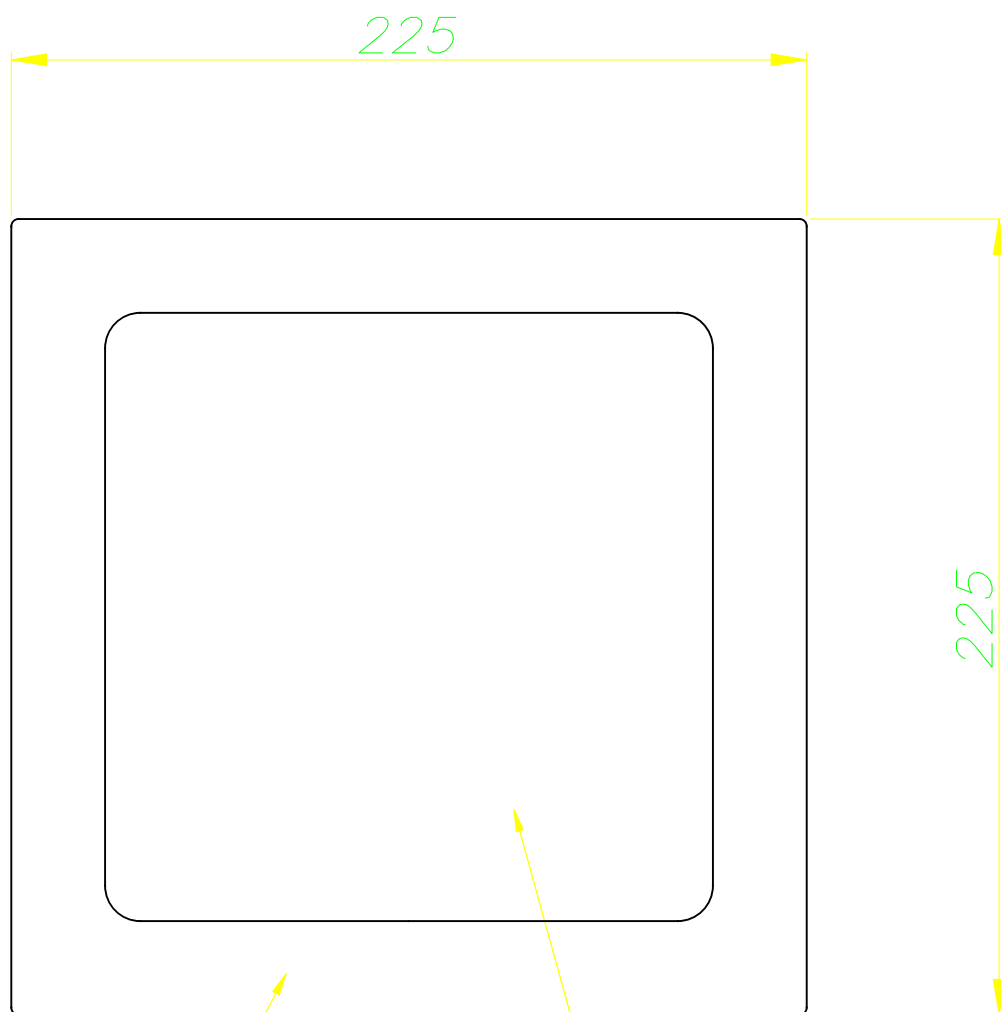


ALUMINIO INYECTADO  
INJECTED ALUMINIUM

ACRÍLICO  
OPAL




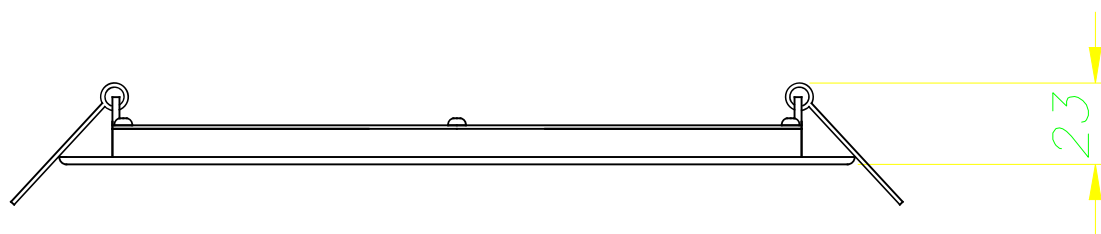


205x205



0-12mm

Scale 1:2

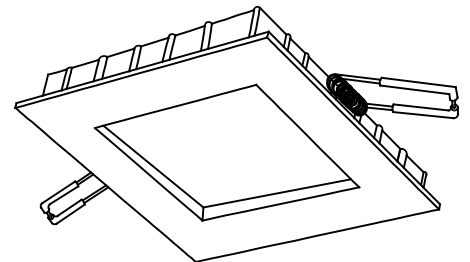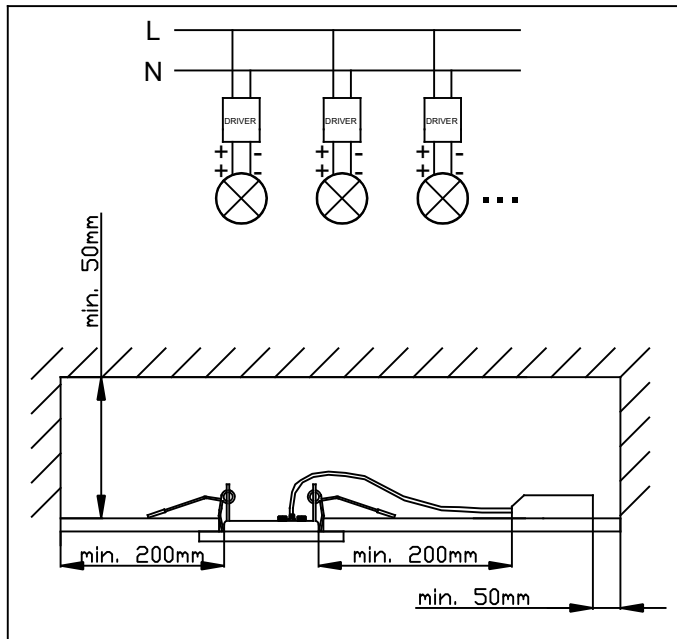

ES) BLOQUE DE CONEXIÓN A RED QUE SE DEBE UTILIZAR (no incluido):  
 EN) MAINS TERMINAL BLOCK REQUIRED (not included):  
 FR) BORNIER DE RACCORDEMENT AU RESEAU REQUIS (non inclus):  
 DE) NOTWENDIGE VERBINDUNGSDOSE FÜR DEN NETZANSCHLUSS (nicht inklusive):

