



**TC-0157-BLA**

V0

## EASY Downlight recessed


### Description

Downlight for indoor use.

For downlighting. Ultra-thin design. Evenly distributed light flow. Structure material: Aluminium. Structure finish: Matt white. Diffuser material: Acrylic. Diffuser finish: Opal. Warranty: 5 Years.

**Finish**  
Matt white  
Opal

**Material**  
Aluminium  
Acrylic



### TECHNICAL CHARACTERISTICS

#### Light source

Light source: LED MLS  
Output (W): 15.5W  
Total power consumption (W): 18.2W  
Color temperature: Neutral white - 4000K  
Real Lumen: 1507  
Qty Leds: 90  
Lm/Real W: 83  
Life Time: 36.000 L70B30  
Bin / Grup: 40-0A o 40-0B  
UGR: 22.1

#### GEAR

Brand: LXD  
Gear included: Yes, electronic  
Voltage / Frequency:  
100-240VAC/50-60Hz  
Power Factor: 0.96


#### Luminaire

Warranty: 5 Years

#### Logistics



Energy Efficiency: LED A++  
EAN Code: 8435381449049  
Net Weight (Kg): 0.515  
Weight in Kg (packaged): 0.645  
Packing: 255 x 45 x 235  
Masterbox: 20

The photograph may not match the reference exactly. Please read the product description to identify the finish.

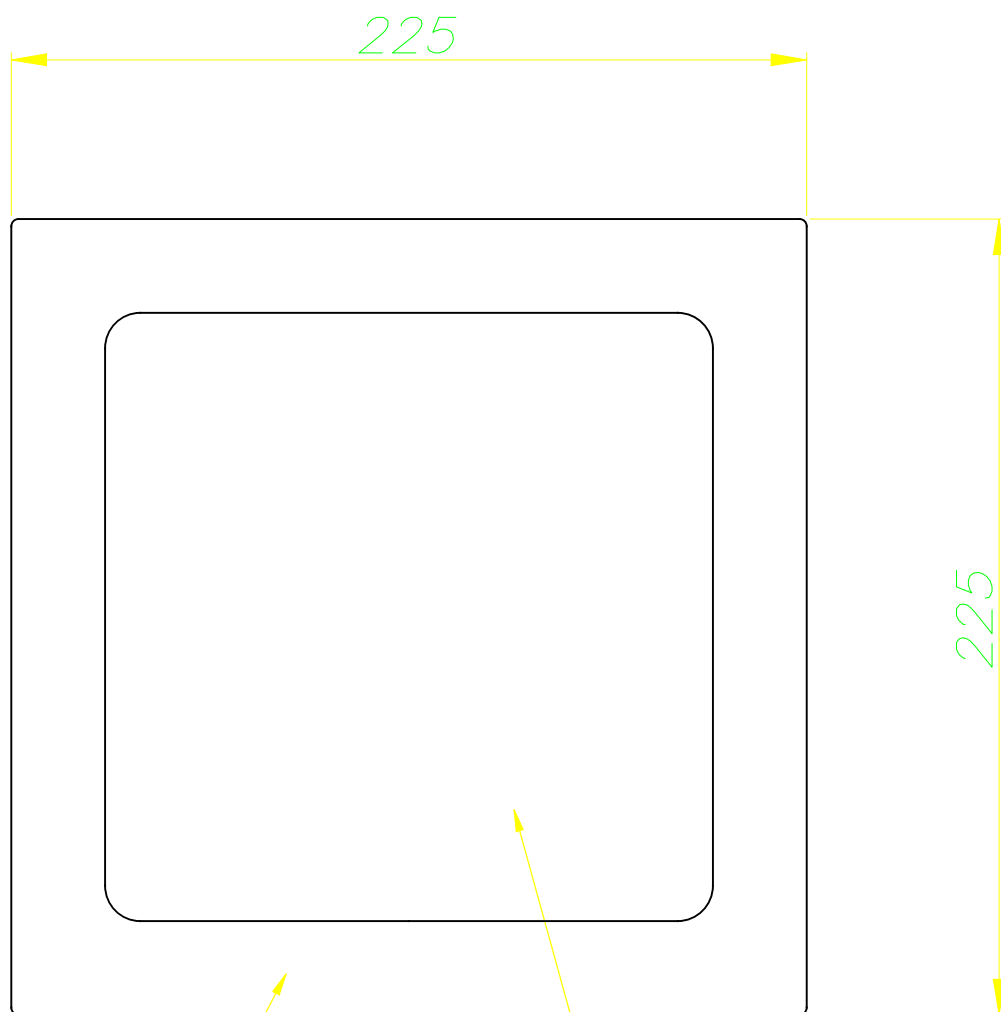


ALUMINIO INYECTADO  
INJECTED ALUMINIUM

ACRÍLICO  
OPAL




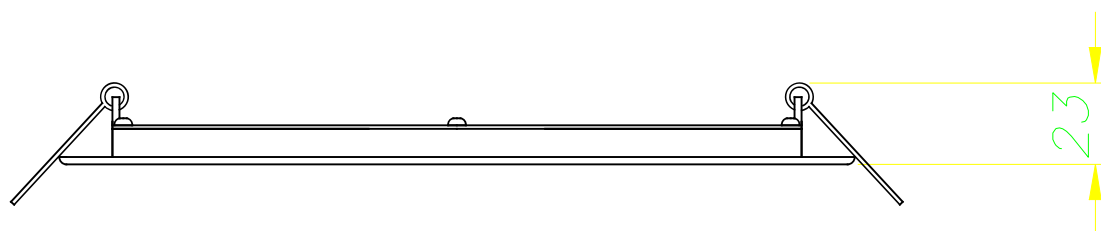


205x205



0-12mm

Scale 1:2

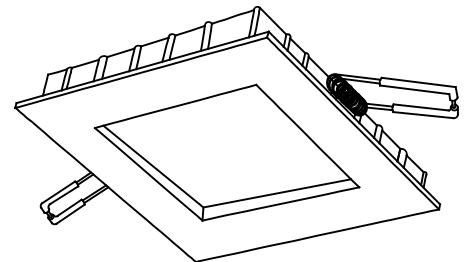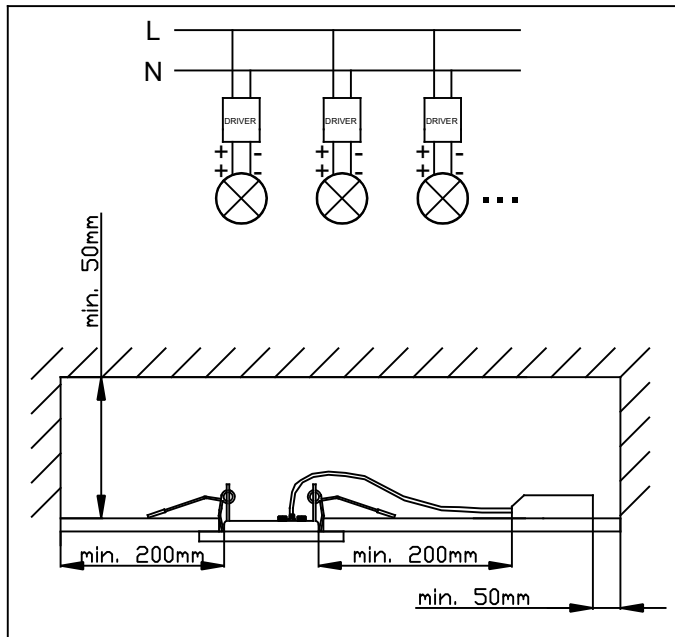

ES) BLOQUE DE CONEXIÓN A RED QUE SE DEBE UTILIZAR (no incluido):  
 EN) MAINS TERMINAL BLOCK REQUIRED (not included):  
 FR) BORNIER DE RACCORDEMENT AU RESEAU REQUIS (non inclus):  
 DE) NOTWENDIGE VERBINDUNGSDOSE FÜR DEN NETZANSCHLUSS (nicht inklusive):

