



## TC-0212-BLA

V0

### EASY Downlight recessed



#### Description

Downlight for indoor use.

For downlighting. Ultra-thin design. Evenly distributed light flow. Structure material: Aluminium. Structure finish: Matt white. Diffuser material: Acrylic. Diffuser finish: Opal. Warranty: 5 Years.

**Finish**  
Matt white  
Opal

**Material**  
Aluminium  
Acrylic



#### TECHNICAL CHARACTERISTICS

##### Light source

Light source: LED MLS  
Output (W): 19.7W  
Total power consumption (W): 22W  
Color temperature: Warm White - 3000K  
CRI: 80  
Real Lumen: 1692  
Qty Leds: 120  
Lm/Real W: 77  
Life Time: 36.000 L70B30  
Bin / Grup: 30-0A o 30-0B  
UGR: 19.3

##### GEAR

Brand: LXD  
Gear included: Yes, electronic  
Voltage / Frequency:  
100-240VAC/50-60Hz  
Power Factor: 0.98




##### Luminaire

Warranty: 5 Years


##### Logistics

Energy Efficiency: LED A++  
EAN Code: 8435381452582  
Net Weight (Kg): 0.840  
Weight in Kg (packaged): 1.062  
Packing: 330 x 45 x 310  
Masterbox: 10

The photograph may not match the reference exactly. Please read the product description to identify the finish.



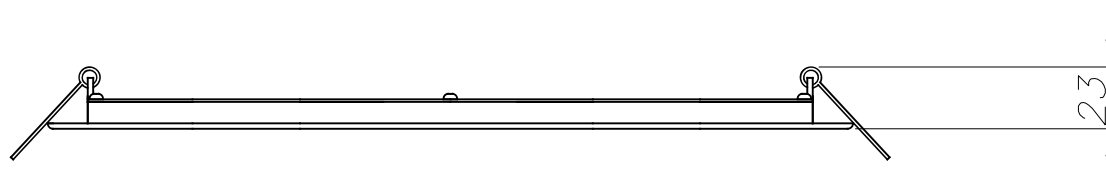
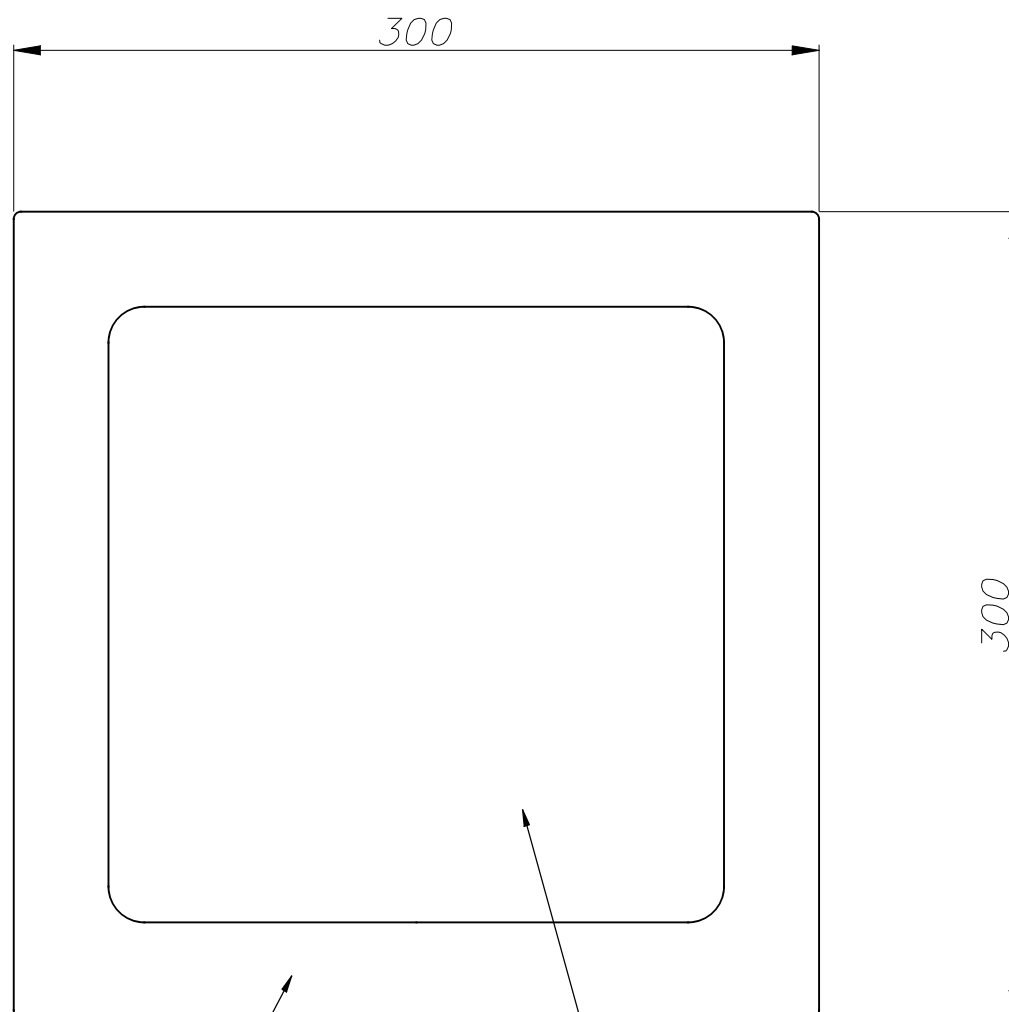


285x285



0-12mm

Scale 1:2

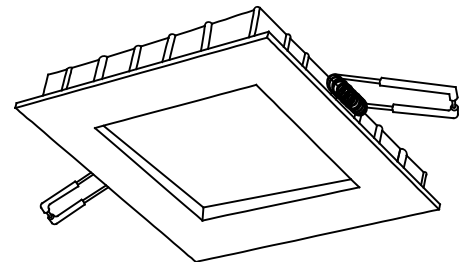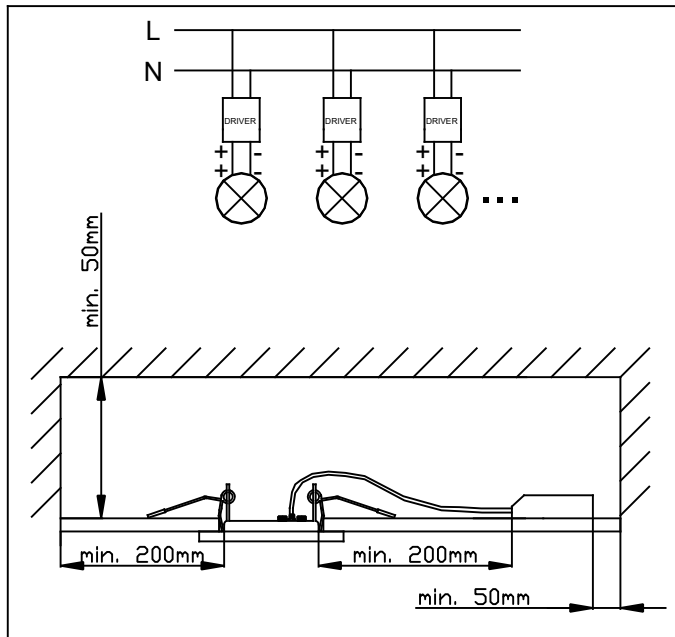

ES) BLOQUE DE CONEXIÓN A RED QUE SE DEBE UTILIZAR (no incluido):  
 EN) MAINS TERMINAL BLOCK REQUIRED (not included):  
 FR) BORNIER DE RACCORDEMENT AU RESEAU REQUIS (non inclus):  
 DE) NOTWENDIGE VERBINDUNGSDOSE FÜR DEN NETZANSCHLUSS (nicht inklusive):

