



TC-0213-BLA

V0

EASY Downlight recessed


Description

Downlight for indoor use.

For downlighting. Ultra-thin design. Evenly distributed light flow. Structure material: Aluminium. Structure finish: Matt white. Diffuser material: Acrylic. Diffuser finish: Opal. Warranty: 5 Years.

Finish
Matt white
Opal

Material
Aluminium
Acrylic



TECHNICAL CHARACTERISTICS

Light source

Light source: LED MLS
Output (W): 19.7W
Total power consumption (W): 22W
Color temperature: Neutral white - 4000K
CRI: 80
Real Lumen: 1692
Qty Leds: 120
Lm/Real W: 77
Life Time: 36.000 L70B30
Bin / Grup: 40-0A o 40-0B
UGR: 19.3

GEAR

Brand: LXD
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.98




Luminaire

Warranty: 5 Years


Logistics

Energy Efficiency: LED A++
EAN Code: 8435381452599
Net Weight (Kg): 0.800
Weight in Kg (packaged): 0.950
Packing: 330 x 45 x 310
Masterbox: 10

The photograph may not match the reference exactly. Please read the product description to identify the finish.



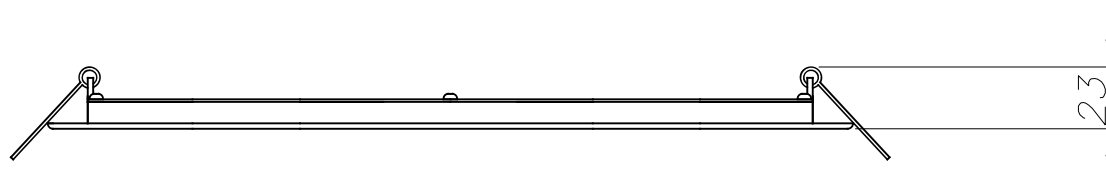
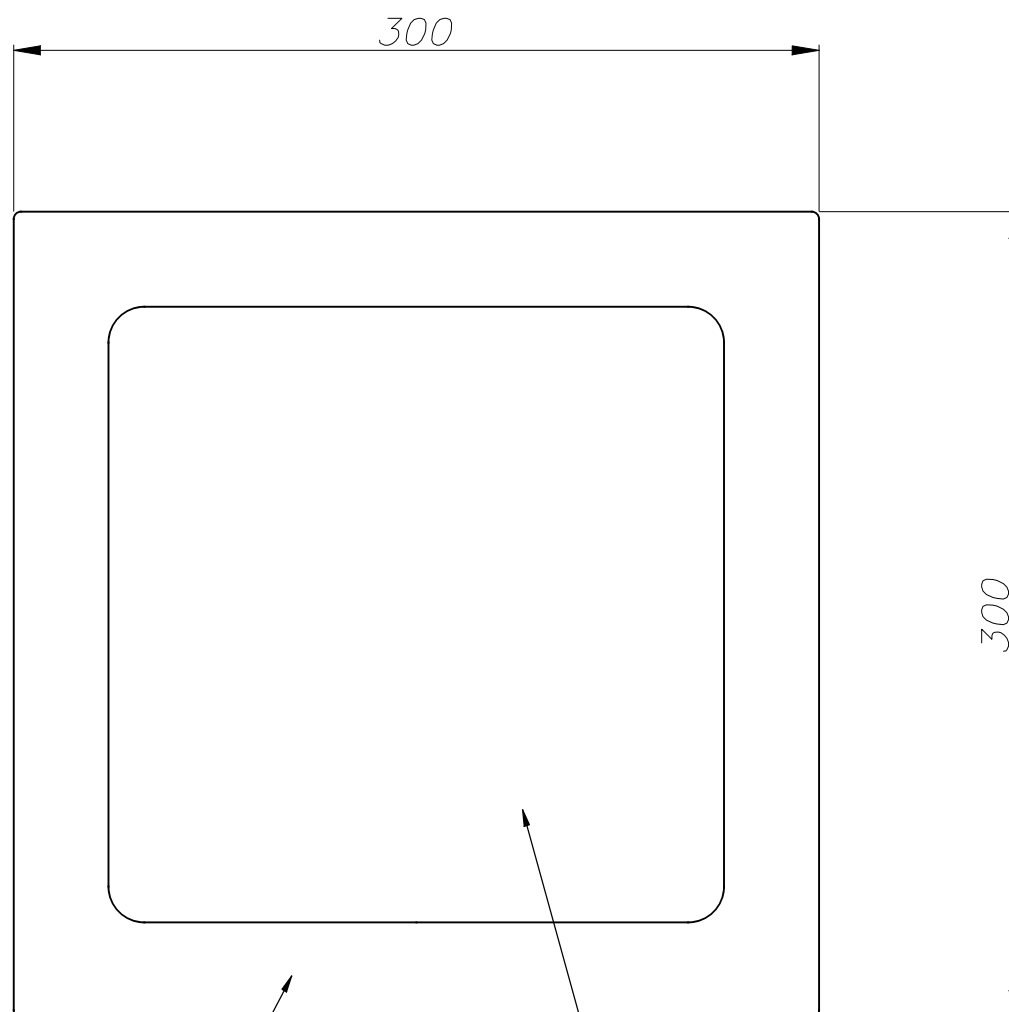


285x285



0-12mm

Scale 1:2

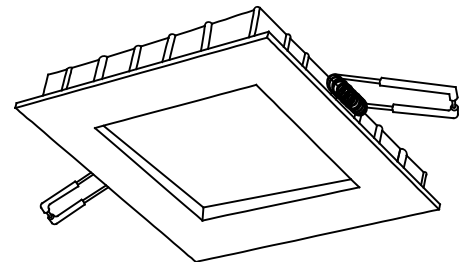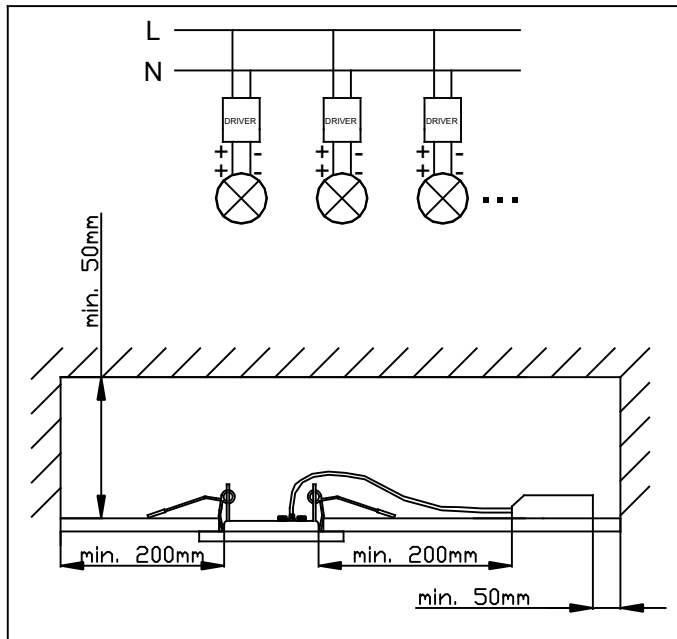

ES) BLOQUE DE CONEXIÓN A RED QUE SE DEBE UTILIZAR (no incluido):
 EN) MAINS TERMINAL BLOCK REQUIRED (not included):
 FR) BORNIER DE RACCORDEMENT AU RESEAU REQUIS (non inclus):
 DE) NOTWENDIGE VERBINDUNGSDOSE FÜR DEN NETZANSCHLUSS (nicht inklusive):

